


## NOKIA SIP Configuration

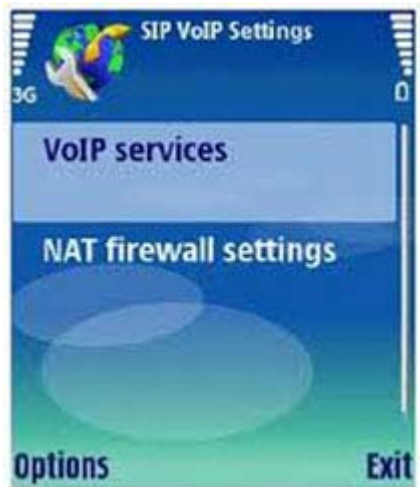

### STEP 1

Go to Tools / Settings / Connection / SIP settings. Create the following profile

Profile Name: MYCALLERVOIP

Profile: IETF Default

Access point: (your WLAN AP name)

Public user name: 12345@66.235.180.11

Use Compression: No

Registration: "Always on "

Use Security: No

### STEP 2

You do not need to enter Proxy Server settings

Proxy Server Address: none

Registrar Server:none

Realm: none

User Name: none

### **STEP 3**

Enter the following for Registrar Server settings

Registrar Server: 66.235.180.11

Realm: 66.235.180.11

User Name: 12345

Password: Enter the password

Transport Type: UDP

Port: 5060

### **STEP 4**

Go to Tools / Settings / Connection / Internet Tel. Settings

Create a new profile for "BYTEPHONE"(12345), name it "BYTEPHONE"

Choose "BYTEPHONE" as Preferred profile

### **STEP 5**

Go to Applications on your phone and click on "SIP VoIP Settings" application.

Choose VoIP

services/MYCALLERVOIP.

Click on "Profile Settings" and find "Allow VoIP over WCDMA" option and change it to "ON"

This change allows VoIP over 3G connection on Nokia phones.

For better voice quality go to Codecs and delete all codecs except G729. There should be only

G729 codec left under codecs settings

### **STEP 6**

Reboot your phone. Once your phone is back on it will automatically register to MYCALLERVOIP

Once it is registered you can start making calls.

Default call type: To switch between normal GSM calls or VOIP calls,

navigate to Tools / Settings / Call / Default call type. Select Cellular to make normal calls to the phone

number or Internet to use VoIP to call the number or address